


## LED Project Light 60W

### DIMENSIONS and SPECIFICATIONS

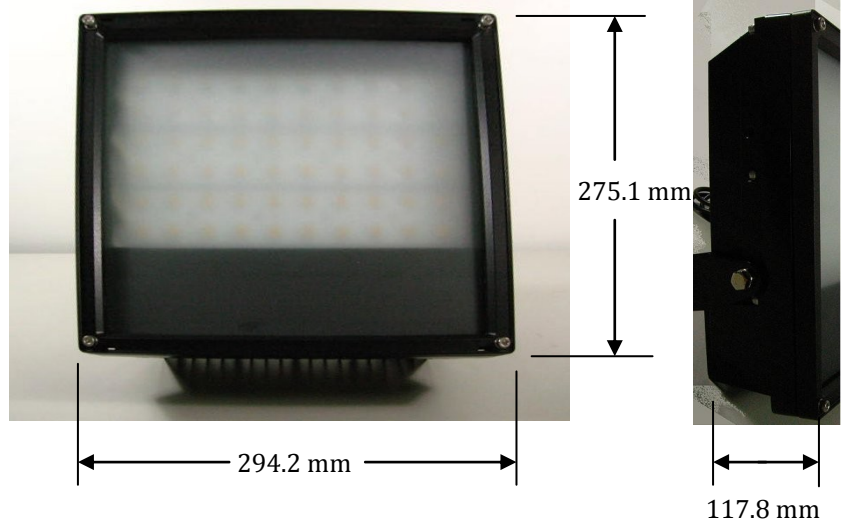

### FEATURES

- Constant current design to drive LEDs
- Over-heat and -voltage protection designs
- Optimal thermal design
- Uniform thermal distribution design
- Dust and water protection

### APPLICATIONS

- |                |                           |
|----------------|---------------------------|
| Institutional  | Tunnel                    |
| Mercantile     | Oil Station               |
| Hospitality    | Parking                   |
| Healthcare     | Outdoor project light     |
| Educational    | Building surface lighting |
| Entertainment  | Park                      |
| Industrial     |                           |
| Transportation |                           |
| Residential    |                           |
| Sports         |                           |
| Recreational   |                           |

### CAUTIONS

- Outdoor use only
- Make sure the installed base strength before installing
- Turn-off the city power before connecting the cable wire of the project light
- Do not drop or impact the product during installation
- Do not stare into beam
- Do not use in a full enclosed fixtures
- Do not change the mechanical design
- Risk of electric shock

### SPECIFICATIONS

Model	72260501	72260602	72260503	72260604
<b>Optical</b>				
Color Temperature	5200 K	3000 K	5200 K	3000 K
Light Color	Neutral White	Warm White	Neutral White	Warm White
Luminous Flux	5023 lm	4019 lm	5023 lm	4019 lm
Beam Angle	60°	60°	60°	60°
CRI	70	75	70	75
Lux at 3 m	610 lux	488 lux	610 lux	488 lux
<b>Electrical</b>				
Nominal Wattage	65 W			
Nominal Voltage	AC 100 — 240 V			
Operating Frequency	50 — 60 Hz			
<b>Mechanical</b>				
Cover	Frosted			
Trestle	Fixed	Adjustable		
Outline Dimension	275 x 350 x 135 mm	118 x 320 x 328 mm		
Net Weight	7.5 Kgs			
Operating Temp.	-30 °C to +50 °C			
IP Level	IP 65			
<b>Packaging</b>				
Pieces / Carton	1			
Box Dimension	517 x 448 x 295 mm / 9.3 KG			
<b>General</b>				
LED's Source	Nichia 083BT LED x 60			